


ECS 253 / MAE 253, Lecture 14

May 17, 2018

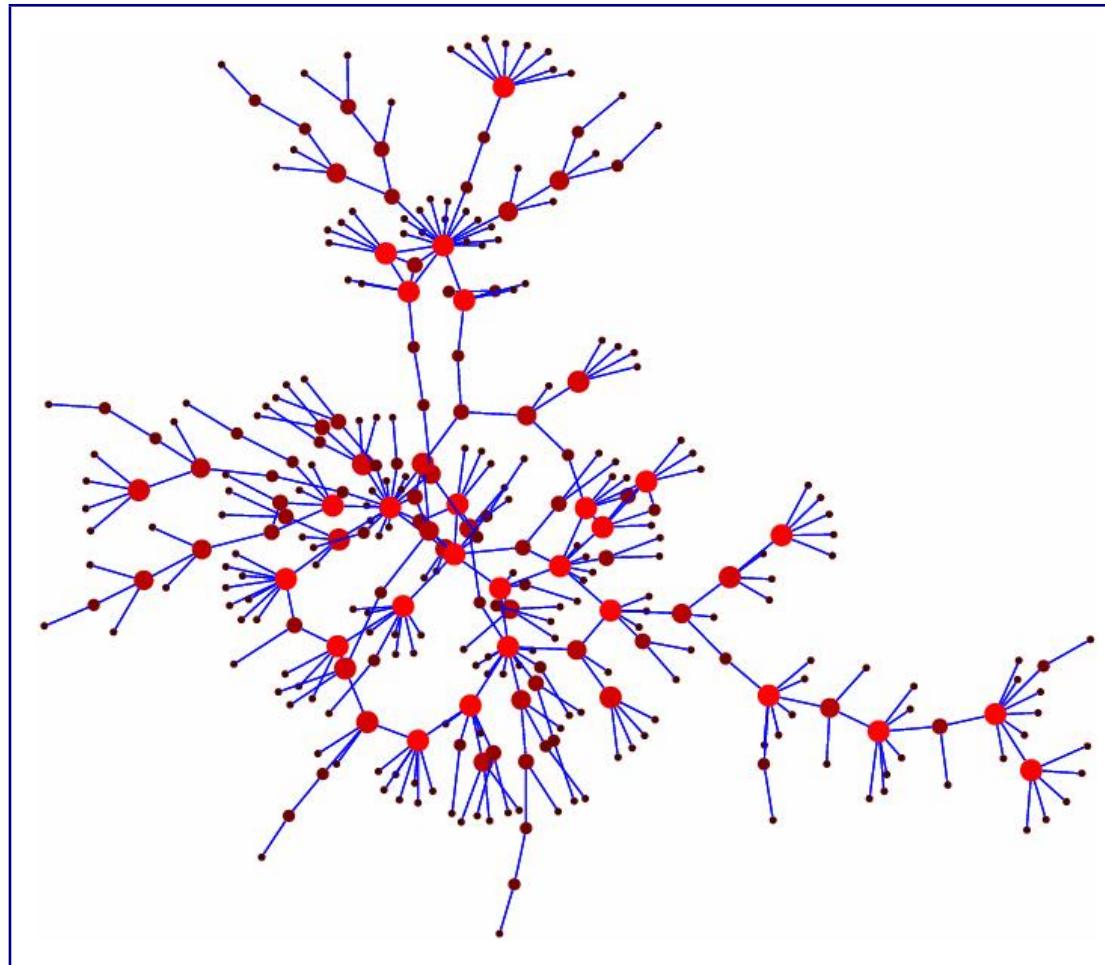

“Diffusion, Cascades and Influence”

Announcements

- Office hours today 4:05-5pm.
- Next week office hours TDB (RD giving stats colloquium 4:10-4pm next Thurs)
- HW4 and HW5 are posted!


Diffusion and cascades in networks (Nodes in one of two states)

- Viruses (human and computer)
 - contact processes
 - epidemic thresholds
- Adoption of new technologies
 - Winner take all
 - Benefit of first to market
 - Benefit of second to market
- Political or social beliefs and societal norms

A long history of study, now trying to add impact of underlying network structure.

Part I. Ensemble approaches


- A. Master equations (Random graph evolution, cluster aggregation)
- B. Network configuration model
- C. Generating functions
 - Degree distribution (fraction of nodes with degree k , for all k)

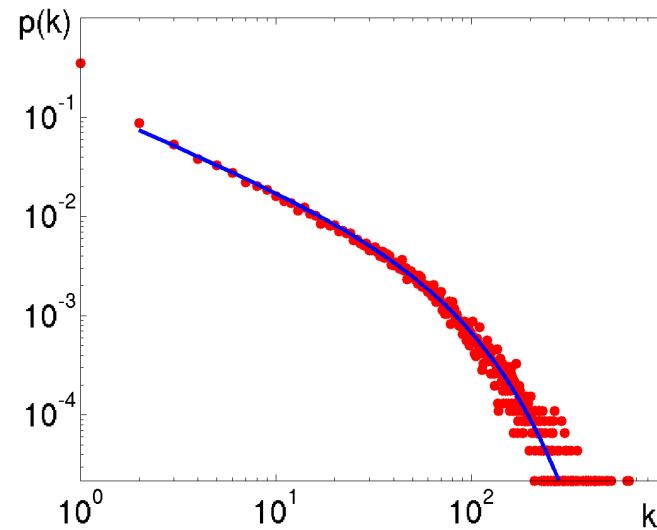

- Degree sequence (A realization, N specific values drawn from P_k)

A. Network Configuration Model

Degree sequence given

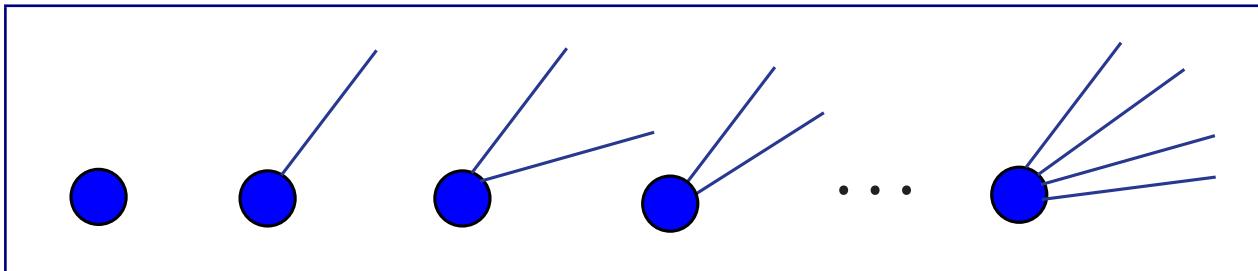

- Bollobas 1980; Molloy and Reed 1995, 1998.
- Build a random network with a specified degree sequence.
- Assign each node a degree at the beginning.
- Random stub-matching until all half-edges are partnered.
(Make sure total # edges even, of course.)
- Self-loops and multiple edges possible, but less likely as network size increases.

HW 4b – build a configuration model and analyze percolation and spreading.

B. Generating functions: Properties of the ensemble of configuration model RGs

Determining properties of the ensemble of all graphs with a given degree distribution, P_k .

- The basic generating function: $G_0(x) = \sum_k P_k x^k$

Note, $G_0(1) = \sum_k P_k = 1$.

- The moments of P_k can be obtained from derivatives of $G_0(x)$:

Calculating moments

- Base: $G_0(1) = \sum_k P_k = 1$ (it is the sum of probabilities).

- First moment, $\langle k \rangle = \sum_k kP_k = G'_0(1)$

(And note $xG'_0(x) = \sum_k kP_kx^k$)

- Second moment, $\langle k^2 \rangle \equiv \sum_k k^2 P_k = \frac{d}{dx}(xG'_0(x))|_{x=1}$

$\frac{d}{dx}(xG'_0(x)) = \sum_k k^2 P_k x^{(k-1)}$

(And note $x\frac{d}{dx}(xG'_0(x)) = \sum_k k^2 P_k x^k$)

- The n-th moment

$$\langle k^n \rangle \equiv \sum_k k^n P_k = \left(x\frac{d}{dx}\right)^n G_0(x)|_{x=1}$$


Generating functions for the giant component of a random graph

Newman, Watts, Strogatz *PRE* 64 (2001)

With the basic generating function in place, can build on it to calculate properties of more interesting distributions.

1. G.F. for connectivity of a node at edge of randomly chosen edge.
2. G.F. for size of the component to which that node belongs.
3. G.F. for size of the component to which an arbitrary node belongs.

Following a random edge

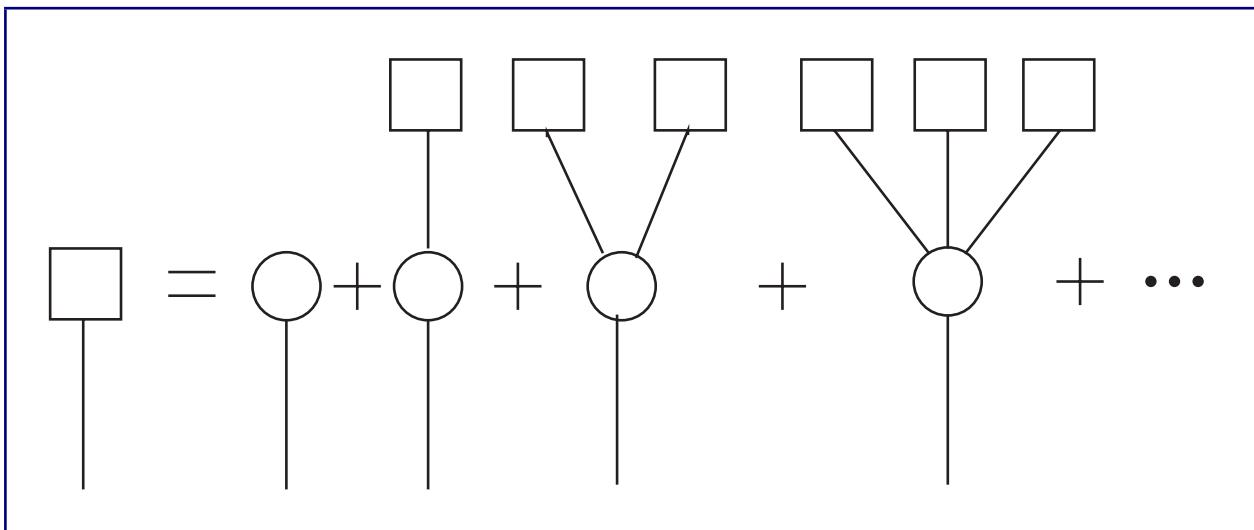

(Circles denote isolated nodes, squares components of unknown size.)

$G_1(x)$ the GF for the excess degree

- Let q_k denote the probability of following an edge to a node with excess degree of k : $q_k = [(k + 1)P_{k+1}] / \langle k \rangle$
- The associated GF

$$G_1(x) = \frac{1}{\langle k \rangle} \sum_{k=0}^{\infty} (k + 1)P_{k+1}x^k$$


$$= \frac{1}{\langle k \rangle} \sum_{k=1}^{\infty} kP_kx^{k-1}$$

$$= \frac{1}{\langle k \rangle} G'_0(x)$$

- Recall the most basic GF: $G_0(x) = \sum_k P_k x^k$

$H_1(x)$, Generating function for probability of component size reached by following random edge

(subscript 0 on GF denotes node property, 1 denotes edge property)

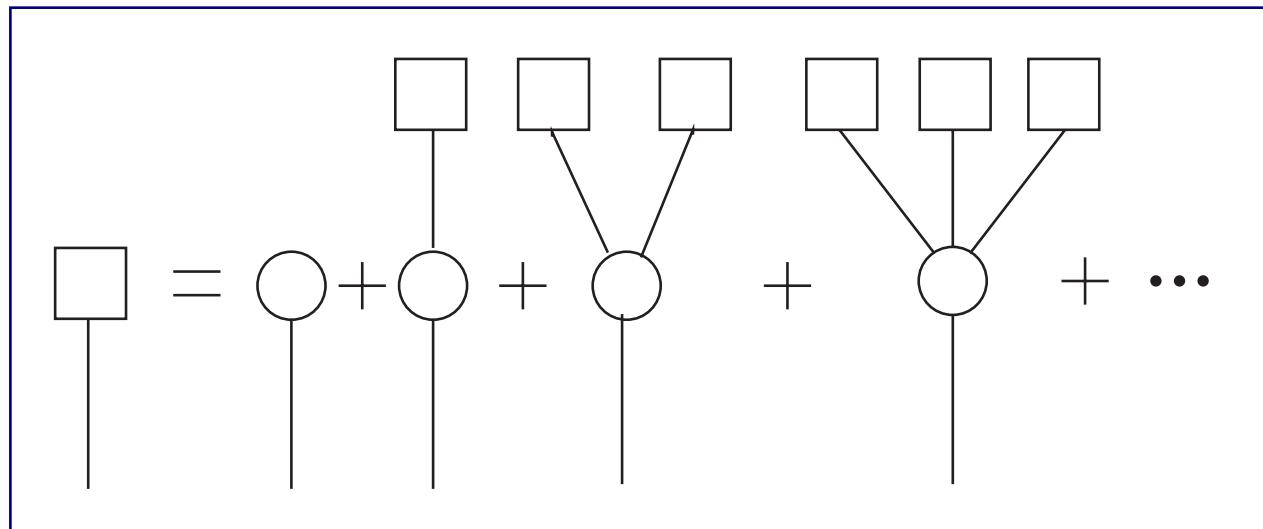

$$H_1(x) = xq_0 + xq_1H_1(x) + xq_2[H_1(x)]^2 + xq_3[H_1(x)]^3 \dots$$

(A *self-consistency* equation. We assume a tree network.)

Note also that $H_1(x) = x \sum_k q_k [H_1(x)]^k = xG_1(H_1(x))$

Aside 1: Self-consistency equations Graphical solution

- See HW 1b: Self-consistency for ER giant component

$$S = 1 - e^{-\langle k \rangle S}$$

- Solve for $S(\langle k \rangle)$ (see Fig a) and plot result in Fig b.

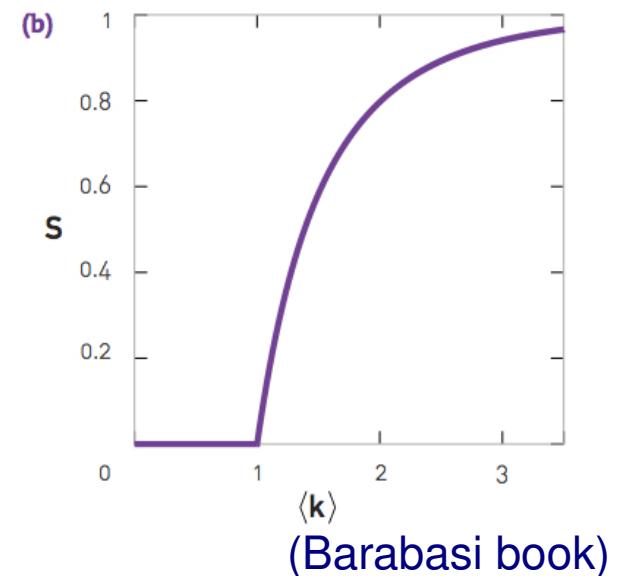
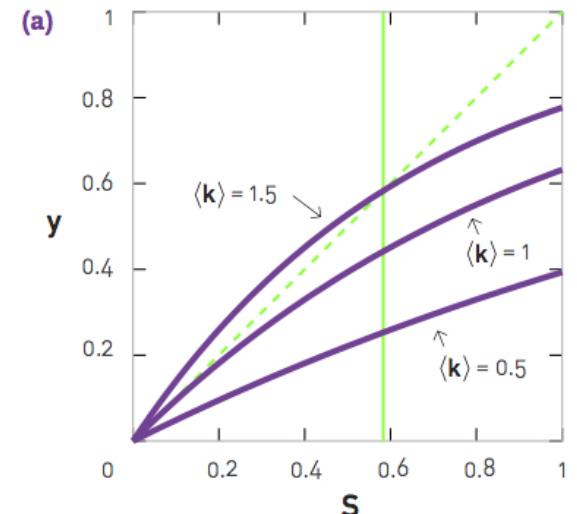


Figure 3.18
Graphical Solution

(Barabasi book)

Aside 2: Powers property

The PGF for the sum of m instances of random variable k is the PGF for k to the m 'th power.

- Let P_k denote the probability distribution for random variable k
- Let Θ_j denote the probability that $\sum_m k = j$
- The associated PGF


$$F_0(x) = \sum_j \Theta_j x^j =$$

$$P_0^m + \binom{m}{1} P_0^{(m-1)} P_1 x + \left[\binom{m}{2} P_0^{m-2} P_1^2 + \binom{m}{1} P_0^{m-1} P_2 \right] x^2 + \dots$$

$$= \left[\sum P_k x^k \right]^m$$

$H_0(x)$, Generating function for distribution in component sizes starting from arbitrary node

Blends both node and edge properties

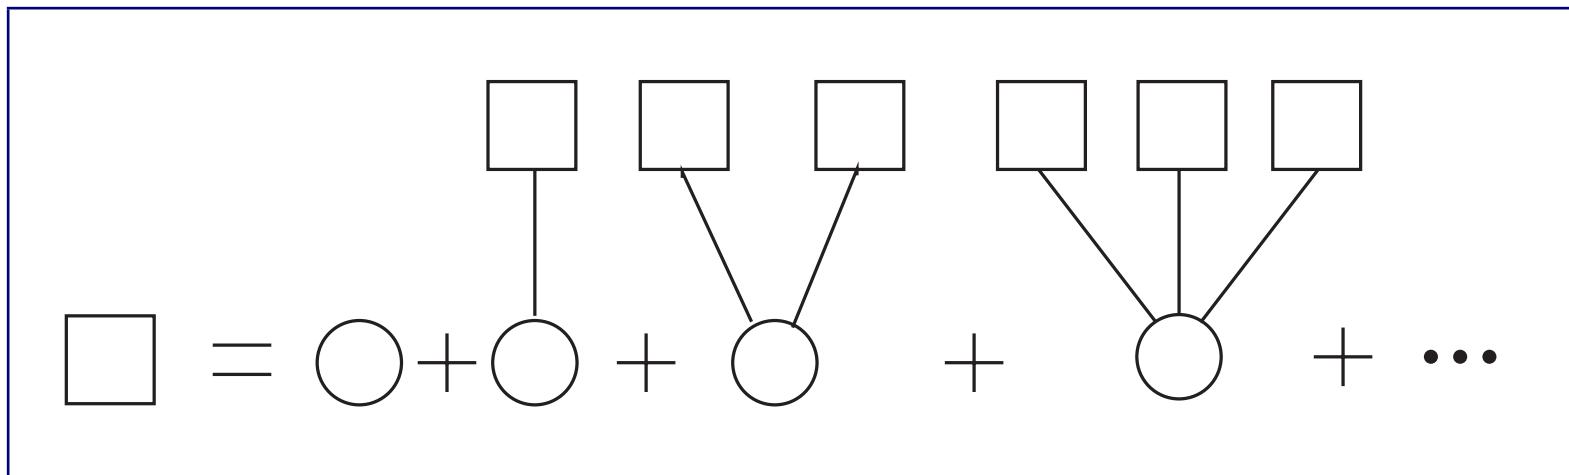

$$\begin{aligned}H_0(x) &= xP_0 + xP_1H_1(x) + xP_2[H_1(x)]^2 + xP_3[H_1(x)]^3 \dots \\&= x \sum_k P_k [H_1(x)]^k = xG_0(H_1(x))\end{aligned}$$

- Can take derivatives of $H_0(x)$ to find moments of component size distribution!

Expected size of a component starting from arbitrary node

- $\langle s \rangle = \frac{d}{dx} H_0(x) \Big|_{x=1} = \frac{d}{dx} x G_0(H_1(x)) \Big|_{x=1}$
 $= G_0(H_1(x)) \Big|_{x=1} + x \frac{d}{dx} G_0(H_1(x)) \frac{d}{dx} H_1(x) \Big|_{x=1}$
 $= G_0(H_1(1)) + \frac{d}{dx} G_0(H_1(1)) \cdot \frac{d}{dx} H_1(1)$

Since $H_1(1) = 1$, and $G_0(1) = 1$ (i.e., they are sum of probabilities)

$$\langle s \rangle = 1 + G'_0(1) \cdot H'_1(1)$$

- Recall (three slides ago) $H_1(x) = xG_1(H_1(x))$

Thus, $H'_1(x) = G_1(H_1(x)) + x\frac{d}{dx}G_1(H_1(x))\frac{d}{dx}H_1(x)$

Thus, $H'_1(1) = 1 + G'_1(1)H'_1(1) \implies H'_1(1) = 1/(1 - G'_1(1))$

And thus, $\langle s \rangle = 1 + \frac{G'_0(1)}{1 - G'_1(1)}$

- Now evaluating the derivative:

$$\begin{aligned}
 G'_1(x) &= \frac{d}{dx} \frac{1}{\langle k \rangle} G'_0(x) = \frac{1}{\langle k \rangle} \frac{d}{dx} \sum_k k P_k x^{(k-1)} \\
 &= \frac{1}{\langle k \rangle} \sum_k k(k-1) P_k x^{(k-2)}
 \end{aligned}$$

- Evaluate at $x = 1$

$$G'_1(1) = \frac{1}{\langle k \rangle} \sum_k k(k-1) P_k = \frac{1}{\langle k \rangle} [\langle k^2 \rangle - \langle k \rangle]$$

Expected size of a component starting from arbitrary node

- $\langle s \rangle = 1 + \frac{G'_0(1)}{1 - G'_1(1)}$
- $G'_0(1) = \langle k \rangle$
- $G'_1(1) = \frac{1}{\langle k \rangle} [\langle k^2 \rangle - \langle k \rangle]$

$$\langle s \rangle = 1 + \frac{G'_0(1)}{1 - G'_1(1)} = 1 + \frac{\langle k \rangle^2}{2\langle k \rangle - \langle k^2 \rangle}$$

Emergence of the giant component

- $\langle s \rangle \rightarrow \infty$
- This happens when: $2 \langle k \rangle = \langle k^2 \rangle$, which can also be written as $\langle k \rangle = (\langle k^2 \rangle - \langle k \rangle)$
- This means expected number of nearest neighbors $\langle k \rangle$, first equals expected number of second nearest neighbors $(\langle k^2 \rangle - \langle k \rangle)$.
- Can also be written as $\langle k^2 \rangle - 2 \langle k \rangle = 0$, which is the famous Molloy and Reed criteria*, giant emerges when:

$$\sum_k k(k-2) P_k = 0.$$

*GF approach is easier than Molloy Reed! (Link to paper on lecture page)

GFs widely used in “network epidemiology”

- Fragility of Power Law Random Graphs to targeted node removal / Robustness to random removal
 - Callaway PRL 2000
 - Cohen PRL 2000
- Onset of epidemic threshold:
 - C Moore, MEJ Newman, Physical Review E, 2000 – MEJ Newman - Physical Review E, 2002
 - Lauren Ancel Meyers, M.E.J. Newmanb, Babak Pourbohlou, Journal of Theoretical Biology, 2006
 - JC Miller - Physical Review E, 2007
- Information flow in social networks
F Wu, BA Huberman, LA Adamic, Physica A, 2004.
- **Cascades on random networks**
Watts PNAS 2002.

Global Cascades on Random Networks

Watts PNAS 2002

- Each node can be in one of two states, say $\{+1, -1\}$.
- Start with almost all nodes in $\{-1\}$, but just one node (or a small fraction of nodes) in $\{+1\}$.
- Nodes update state asynchronously. For node j if the fraction of its neighbors in state $+1$ is greater than a threshold function Φ_j , j switches to $+1$ and stays in that state forever.
- The thresholds Φ_j are drawn at random from a distribution $f(\Phi)$ which is normalized in the usual way: $\int_0^1 f(\Phi)d\Phi = 1$.
- *Local dependence, fractional threshold Φ_j , heterogeneous degree* make this model differ from contact processes.

Global cascades?

- Question: for what kinds of networks and thresholds will a small perturbation (of even one node) cause a fraction of all nodes to flip? (i.e. a global cascade).
- Some terms:
Innovator – The first node(s) flipped to +1.
Early adopter / vulnerable – A neighbor of innovator who flips right away.
- Early adopter must have threshold $\Phi_j \leq 1/k_j$, or equivalently degree $k_j \leq K_j = \lfloor 1/\Phi_j \rfloor$

Using GFs can reduce a complicated dynamics to a static percolation problem

- As usual, degree distribution P_k .
- A node is *vulnerable / early adopter* if its threshold $\Phi \leq 1/k$.
The probability a given node of degree k is vulnerable is thus

$$\rho_k = P[\Phi \leq 1/k] = \int_0^{1/k} f(\Phi) d\Phi.$$

- The probability a node drawn uniformly at random from all nodes has 1) degree k , and 2) is vulnerable is thus: $\rho_k P_k$.
- Generating function for this (our base GF)

$$G_0(x) = \sum_k \rho_k P_k x^k.$$

Note: $G_0(1) \leq 1$.


e.g., $G_0(1) = 0$ if there are no vulnerable nodes

“Propagation” of a cascade is edge following from a vulnerable node

- As with the basic framework, probability of following edge to node of degree k is proportional to k .
- GF for following a random edge to a *vulnerable* node of degree k . (Again, observe building up process.):


$$\begin{aligned} G_1(x) &= \sum_k (k \rho_k P_k) / \sum_k k P_k = G'_0(x) / \langle k \rangle \\ &= G'_0(x) / G'_0(1) \end{aligned}$$

GF for size of component made of vulnerable nodes found by following initial edge:

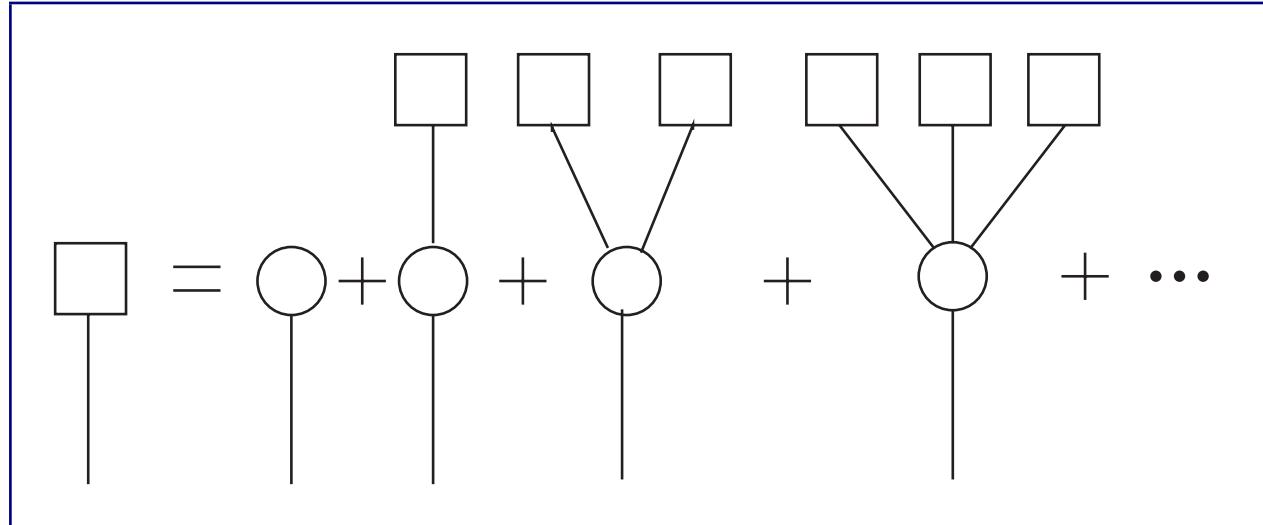

$$H_1(x) = [1 - G_1(1)] + xG_1(H_1(x)).$$

GF for size of component made of vulnerable nodes found by choosing arbitrary node:

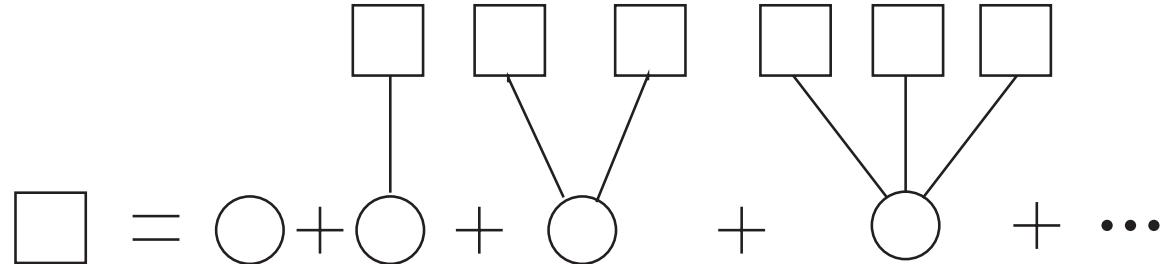


$$H_0(x) = [1 - G_0(1)] + xG_0(H_1(x)).$$

This leads to the cascade condition:

$$\sum_k k(k-1)\rho_k P_k > \langle k \rangle$$


Results: Theory and simulation

Uniform thresholds on random graph where all nodes have degree z (a z -regular random graph)

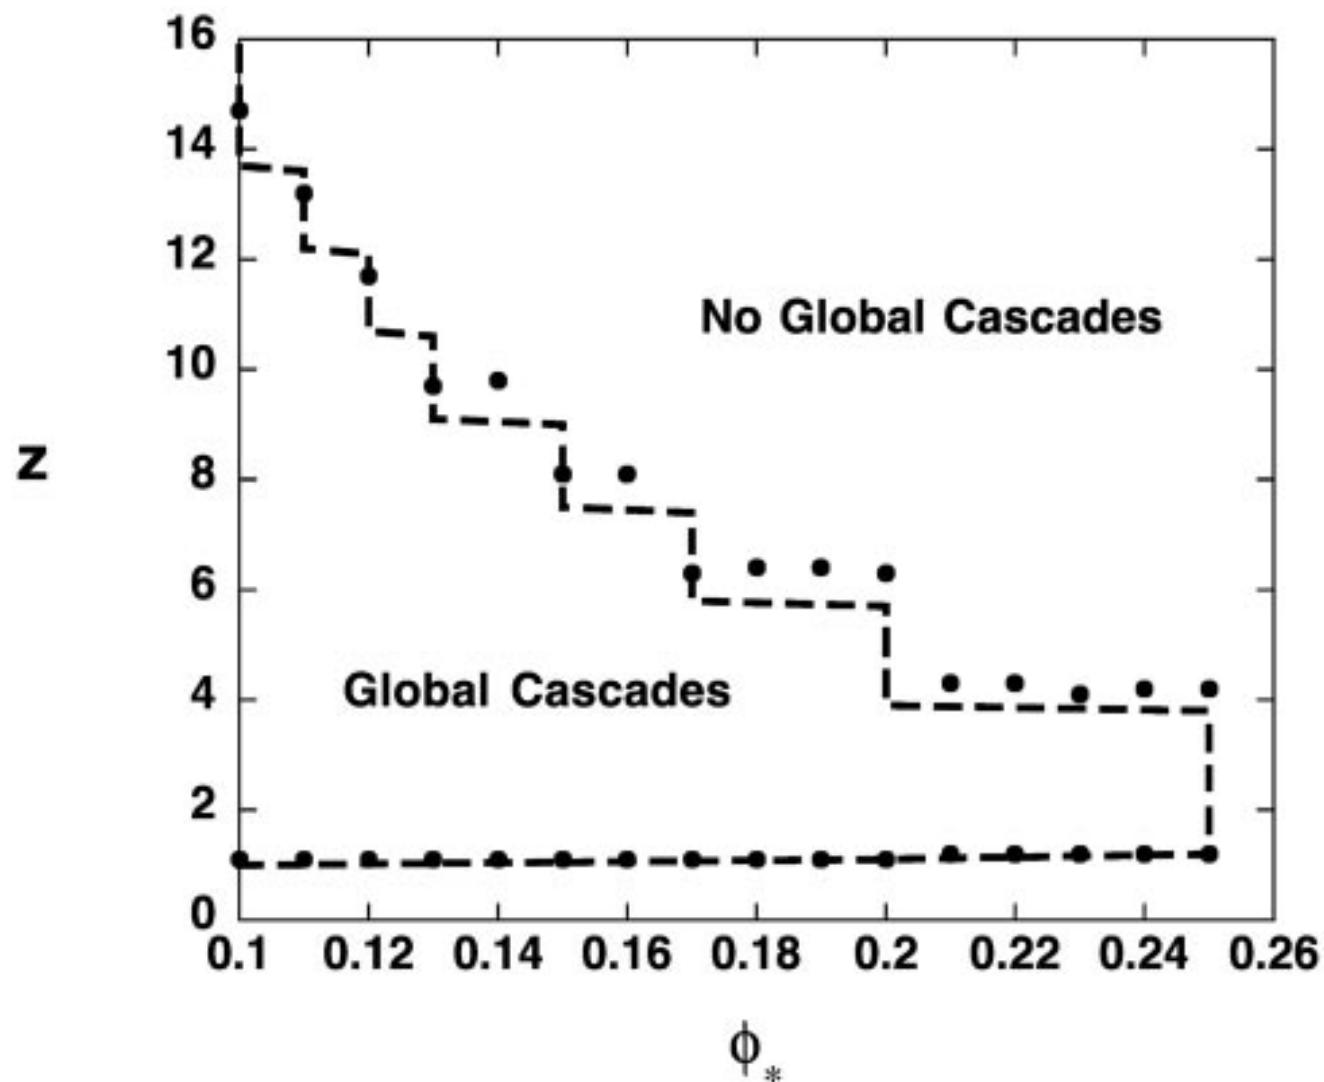

Results: Theory and simulation

- (a) Normally distributed thresholds with std dev σ , on z -regular random graph.
- (b) Uniform threshold on regular vs power law random graph.

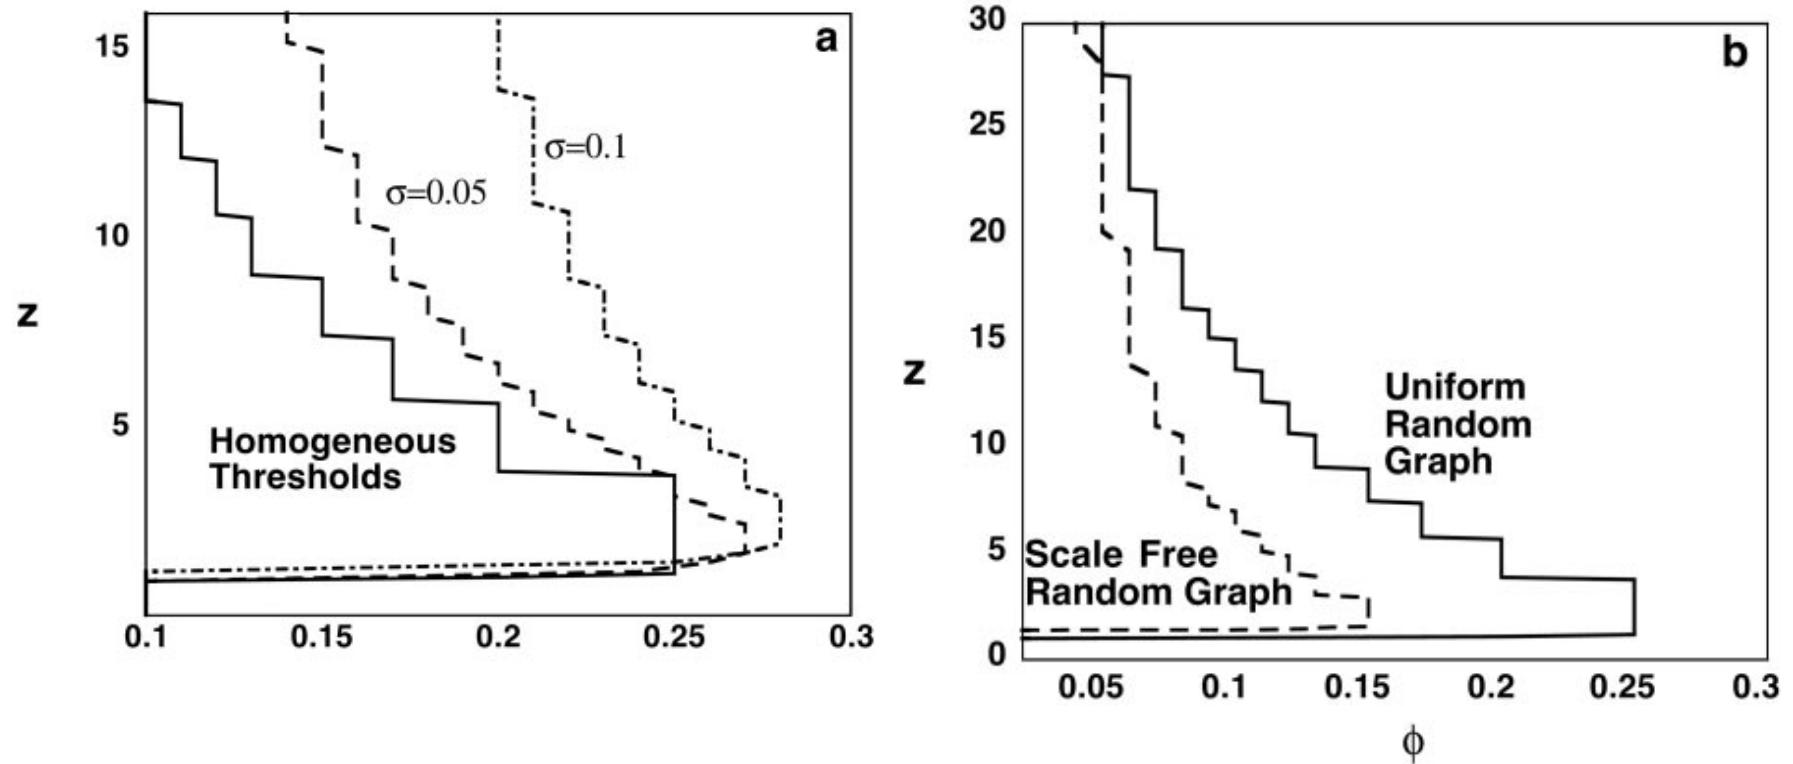

- Heterogeneous thresholds seem to enhance global cascades.
- Heterogeneous node degrees seem to reduce global cascades.

Generating function approach to adoption of new behavior: Watts PNAS (2002)

- All nodes, except one, start in “inactive” state, $\{-1\}$
- Fractional threshold model (Φ_i).
 - Node “activated” once a fraction of its neighbors $\geq \Phi_i$ are active.
 - A *vulnerable* node is one that needs only a single neighbor to be active before it flips (i.e., $\Phi_i \leq 1/k$).
 - Use generating functions to calculate the expected size of clusters of vulnerable nodes.
 - A “Global cascade” corresponds to a giant component
- Results
 - Heterogeneity in thresholds (Φ_i) **enhances** global cascades.
 - Heterogeneity of degree (P_k) **suppresses** global cascades.

Susceptibles versus influentials

- A long debate
- Malcolm Gladwell vs Duncan Watts
- Aral and Walker, *Science*, 2012.

Diffusion, Cascade behaviors, and influential nodes

Part II: Contact processes with individual node preferences

- Long history of empirical / qualitative study in the social sciences (Peyton Young, Granovetter, Martin Nowak ...; diffusion of innovation; societal norms)
- Recent theorems: “network coordination games” (bigger payout if connected nodes in the same state)
(Kleinberg, Kempe, Tardos, Dodds, Watts, Domingos)
- Finding the influential set of nodes, or the k most influential
Often NP-hard and not amenable to approximation algorithms
- Key distinction:
 - **Thresholds of activation** (leads to unpredictable behaviors)
 - **Diminishing returns** (submodular functions nicer)

Part II. Network Coordination Games

- The most basic model: Reviewed in Kleinberg “Cascading Behavior in Networks: Algorithmic and Economic Issues”, Chap 24 of *Algorithmic Game Theory*, (Cambridge University Press, 2007).
- Again each node in one of two states, say $\{-1, +1\}$.
- Play a game with each connected neighbor independently. Total payout is sum over all games.
- Assume neighbor(s) of j in fixed state while j updates.
- Positive payout if connected nodes i and j adopt the same state. No payout if they differ. And -1 can have different payout than $+1$ coordinated behavior.

Payout matrix:

q	0
0	$(1-q)$

How each node operates

- Again assume all other nodes fixed while node j updates.
- It has k_j^A neighbors in state -1 , and k_j^B neighbors in state $+1$.
- If node j chooses state -1 , payout of qk_j^A .
- If node j chooses state $+1$, payout of $(1 - q)k_j^B$.
- Chooses -1 if $qk_j^A > (1 - q)k_j^B$.
- Substitute in $k_j = k_j^A + k_j^B$ and rearrange:
Criteria: choose -1 if $k_j^B < qk_j$ and $+1$ if $k_j^B > qk_j$.
- A **threshold** model! Adopt $+1$ if a fraction q of your neighbors have state $+1$.

Finding the influential nodes

Motivation

- Viral marketing – use word-of-mouth effects to sell product with minimal advertising cost.
- Design of search tools to track news, blogs, and other forms of on-line discussion about current events

Finding the influential nodes: formally

- The minimum set $S \in V$ that will lead to the whole network being activated.
- The optimal set of a specified size $k = |S|$ that will lead to largest portion of the network being activated.

Due to thresholds/ critical mass

- In general NP-hard to find optimal set S .
- NP-hard to even find an approximate optimal set (optimal to within factor $\eta^{1-\epsilon}$ where n is network size and $\epsilon > 0$.) (“inapproximability”)
- Due to thresholds (esp if each node can have its own) might have a tiny activated final set of nodes but it jumps abruptly if just a few more nodes or, moreover, the right nodes activated.
- Kleinberg calls this abrupt response the “Knife edge” property


Diminishing returns (No longer a threshold, but a concave function)

- Each additional friend who adopts the new behavior enhances your chance of adopting the new behavior, but with less influence for each additional friend


- Basis for models:

- Probability of adopting new behavior depends on the number of friends who have adopted [Bass '69, Granovetter '78, Shelling '78]

- What's the dependence?

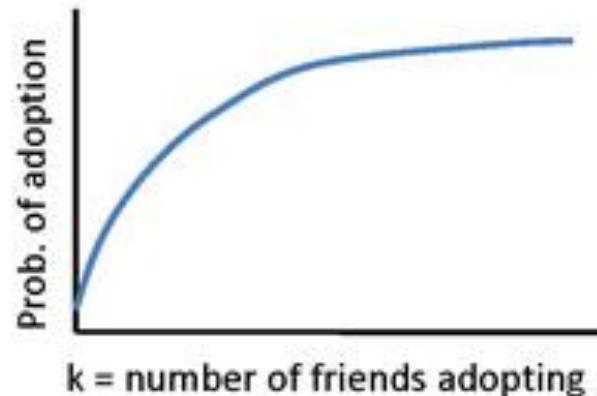

Diminishing returns?

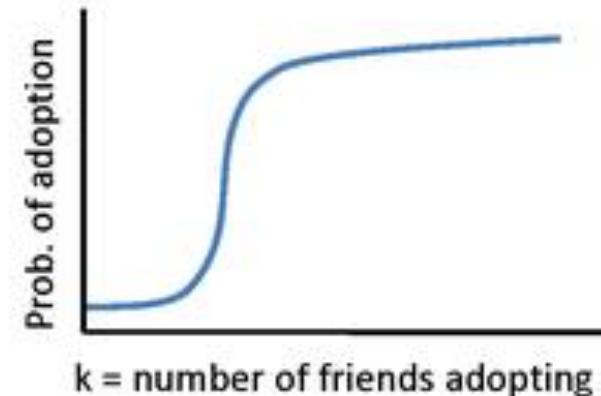

Critical mass?


(from Leskovec talk)

Diminishing returns (Submodular / concave function)

- The benefit of adding elements decreases as the set to which they are being added grows.
- So no longer get to have more influence from family or other special nodes. (Instead its the first nodes exert more influence.)
- Since no longer have special nodes easy to build up optimal set S of k nodes.
- **Hill climbing** – add one at the time nodes to the set S that cause maximum impact.

Hill climbing

An Approximation Result




- Diminishing returns: $p_v(u, S) \geq p_v(u, T)$ if $S \subseteq T$
- Hill-climbing: repeatedly select node with maximum marginal gain
- Performance guarantee: hill-climbing algorithm is within $(1-1/e) \sim 63\%$ of optimal [Kempe et al. 2003]

(from Leskovec talk)

Submodular and hill climbing more formally:

An Approximation Result



- Analysis: diminishing returns at individual nodes implies diminishing returns at a “global” level
 - Cascade size $f(S)$ grows slower and slower with S .
 f is submodular: if $S \subseteq T$ then
$$f(S \cup \{x\}) - f(S) \geq f(T \cup \{x\}) - f(T)$$
 - Theorem [Nemhauser et al. '78]:
If f is a function that is monotone and submodular, then k -step hill-climbing produces set S for which $f(S)$ is within $(1-1/e)$ of optimal.

(from Leskovec talk)

Empirical observations


Part 2: Empirical Analysis

- What do diffusion curves look like?
- How do cascades look like?
- Challenge:
 - Large dataset where diffusion can be observed
 - Need social network links and behaviors that spread
- We use:
 - Blogs: How information propagates? [Leskovec et al. 2007]
 - Product recommendations: How recommendations and purchases propagate? [Leskovec-Adamic-Huberman 2006]
 - Communities: How community membership propagates? [Backstrom et al. 2006]

(from Leskovec talk)

How do diffusion curves look like?


- Viral marketing – DVD purchases:

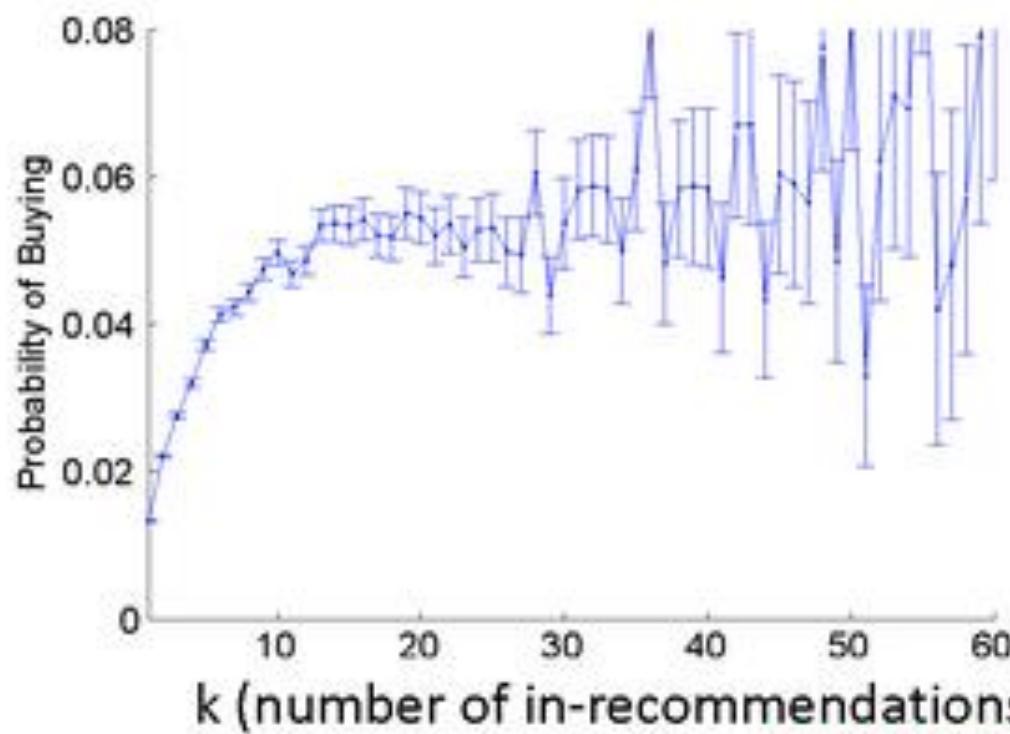

- Mainly diminishing returns (**saturation**)
- Turns upward for $k = 0, 1, 2, \dots$

(from Leskovec talk)


Joining Livejournal: on online bulletin board network

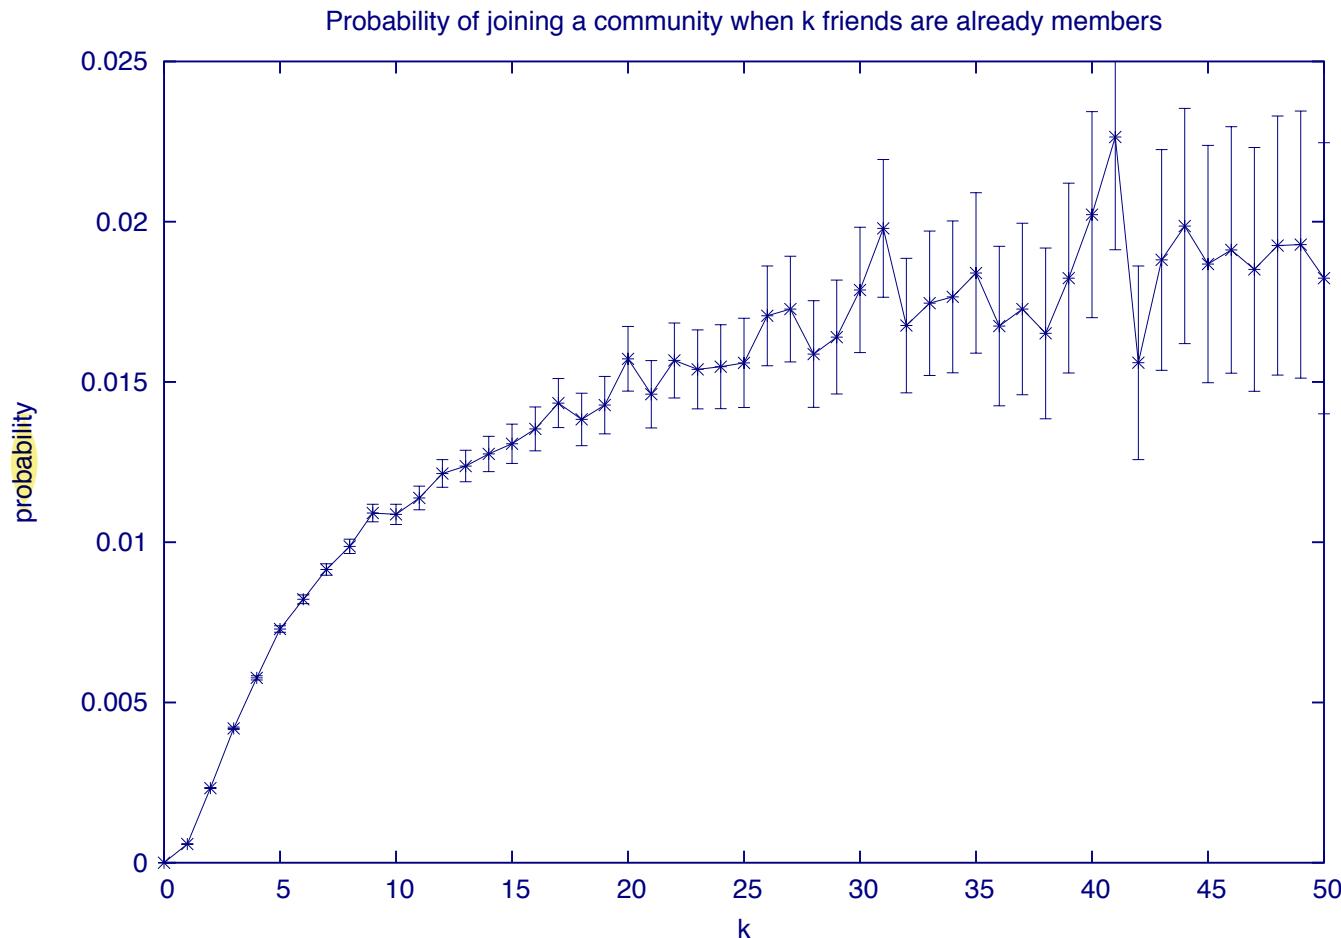

- Diminishing returns only sets in once $k > 3$.
- Network effect not illustrated by curve: If the k friends are highly clustered, the new user is more likely to join.

How Do Cascades Look Like?

- How big are cascades?
- What are the building blocks of cascades?

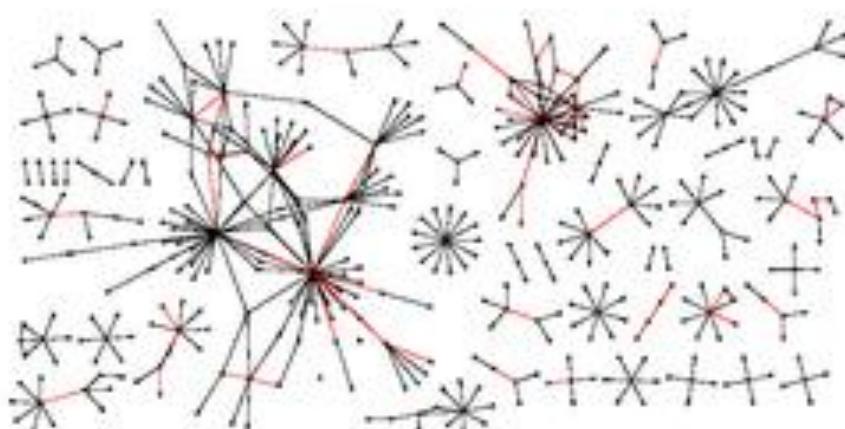

Medical guide book



DVD

(from Leskovec talk)